


D-DD

Base Product



Fiber Optic Cable, Drop, Outdoor Arid Core Gel-Free Tubes, Double Jacket Dielectric

- Fiber drop cables are typically used between the fiber terminal and the building or home and available for various indoor or outdoor applications
- Fiber drop cables are engineered to withstand the most demanding environmental conditions, including sun, heat, cold, moisture and heavy RF interference
- Superior mechanical and optical performance with unmatched stability and quality


Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber drop cable
Product Series	D-DD

General Specifications

Construction Type	Non-armored
Subunit Type	Gel-free
Inner Jacket Color	White
Jacket Color	Black

Ordering Tree

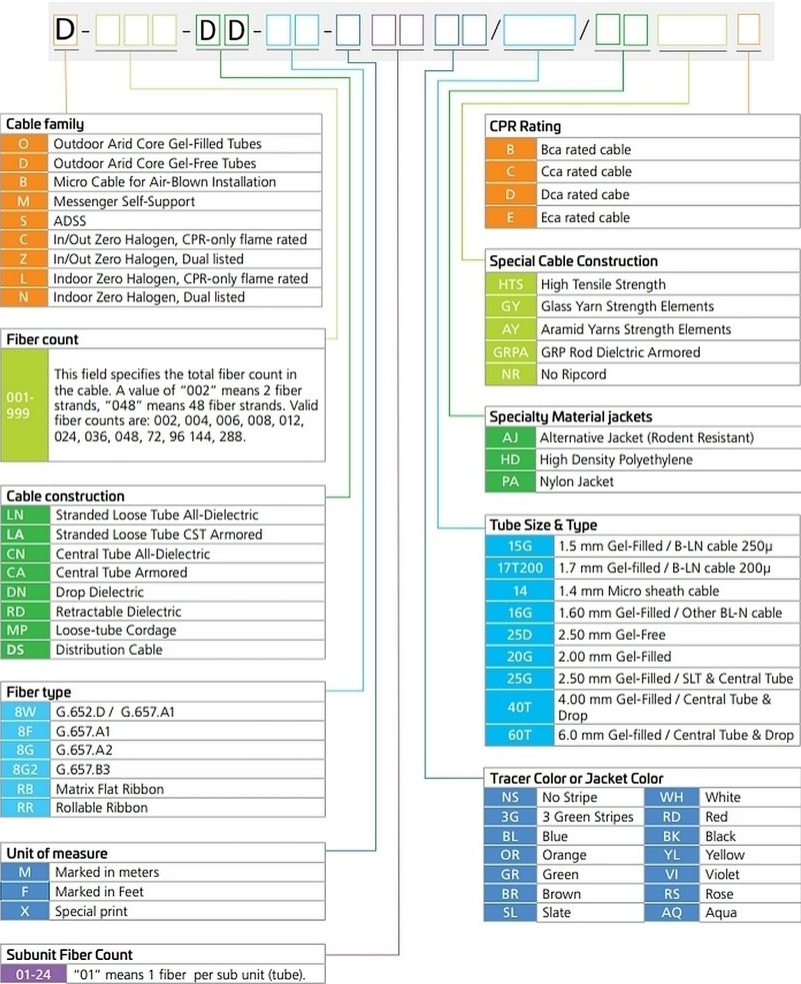

Material Specifications

Jacket Material	High density polyethylene (HDPE)
Inner Jacket Material	Low Smoke Zero Halogen (LSZH)

Environmental Specifications

Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	IEC 60794-1-2
Jacket UV Resistance	UV stabilized

* Footnotes

D-DD

Operating Temperature Specification applicable to non-terminated bulk fiber cable